

Standard Filtration

Single Filtration Procedure for the thick chips OR the thin chips

Model	CC-SF
Dimension	57cmX38cmX116cm
Capacity	6.5 L
Weight	70 KGS
Max Flow	180 Liter/per min (47.495alon/per min)
Pressure	0.5Bar(7.25Psi)~8.3Bar(120Psi)
Filtration Accuracy	380um
Filter Material	Stainless 304 or Filter Bag



RL RHPT
AiCLOS
Chip Cleaner

High Precision Filtration

Modular design.

Dual filtration for the thick chips AND the thin chips able to be collected at the same time.

Model	CC-HPF
Dimension	97cmX38cmX118cm
Capacity	6.5 L + 2 L
Weight	85 KGS
Max Flow	180 Liter/per min (47.495alon/per min)
Pressure	0.5Bar(7.25Psi)~8.3Bar(120Psi)
Filtration Accuracy	Customized
Filter Material	Stainless 304 or Filter Bag




POWERTOOLS

POWERTOOLS SINGAPORE PTE LTD

7 Yishun Industrial Street 1 #03-43 NorthSpring Bizhub Singapore 768162
Tel: 65-6570 1172 Fax: 65-6570 1182 Email: sales@powertools.com.sg
www.powertools.com.sg Co. Reg. No. 201007910C GST Reg. No.: 201007910C

AiCLOS Chip Cleaner

Suitable for multiple Machinery

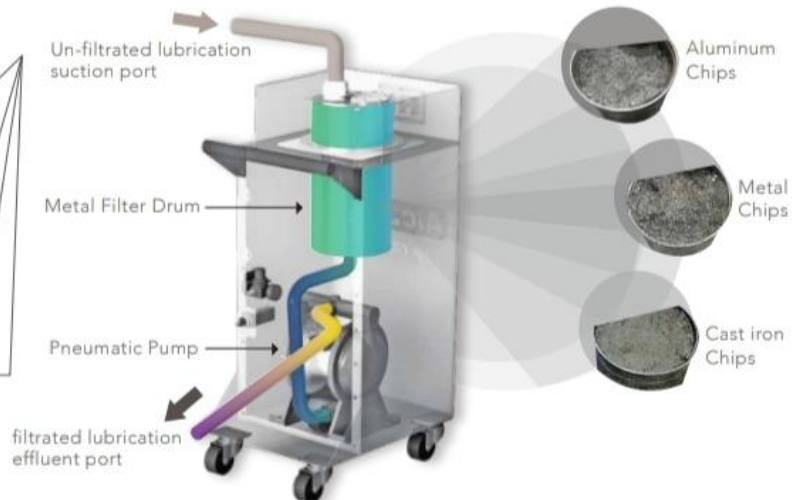

Advantage & Optimization

- Pneumatically operated, electricity free. Avoid the potential damage caused by the pump idling.
- High efficiency, not necessary to shut down the machine tool.
- Portable with wheel.
 - Adjustable by customer's precision demand.
 - Extend the lubrication life cycle, decrease the odor and the germ growth.
 - Solve the chip & sludge desposition problem completely.

Service & Warranty

- Assembled only by the best components.
- Comprehensive after-sales service.
- High quality.
- Customized available.

